


**ACURA**  
**INSTALLATION**  
**INSTRUCTIONS**

Accessory	Application	Publications No.
<b>AUTOMATIC DAY/NIGHT MIRROR</b>	<b>MDX</b>	<b>BII 32732</b>
		Issue Date
		<b>OCT 2006</b>

**PARTS LIST**

**Automatic Day/Night Mirror Kit (Sold Separately):**  
**P/N 08V03-SDA-100B**


Day/night mirror



Clip




Operating instructions




**Automatic Day/Night Mirror Attachment Kit (Sold Separately):**  
**P/N 08V03-STX-200**

Upper and lower covers




Mirror harness



**TOOLS AND SUPPLIES REQUIRED**

- Phillips screwdriver
- Flat-tip screwdriver
- Needle-nose pliers
- Shop towel

**Illustration of the Day/Night Mirror Installed on the Vehicle**

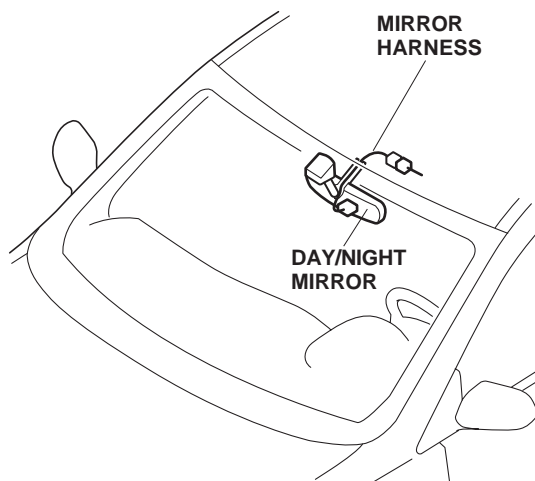


**INSTALLATION**


**Customer Information:** The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

1. Make sure you have the anti-theft code for the radio, then write down the radio station presets.
2. Disconnect the negative cable from the battery.


- Using a flat-tip screwdriver and a shop towel, remove the map light (one retaining clip, two retaining tabs, and unplug the two vehicle connectors).

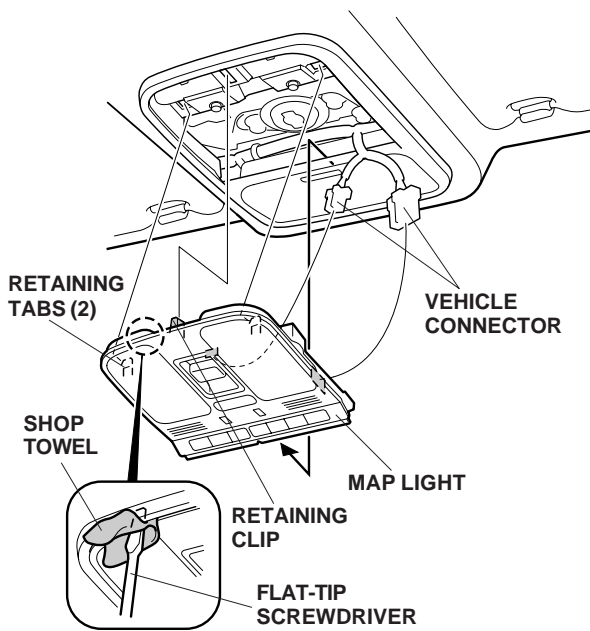


- Remove the roof console (four screws).

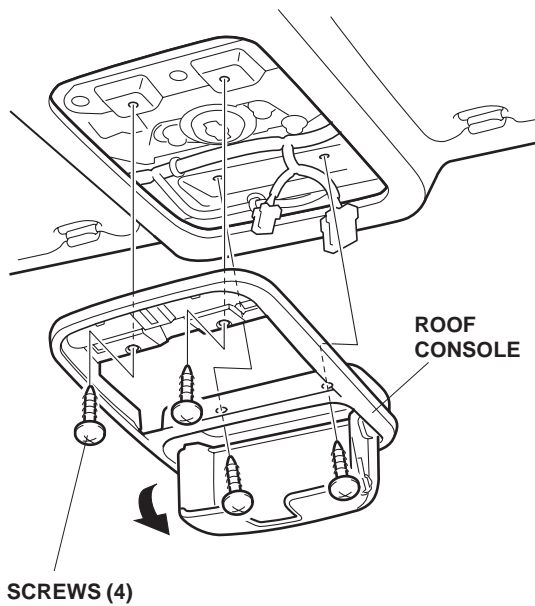


- Remove the rearview mirror from the holder by rotating the stay 90° clockwise.

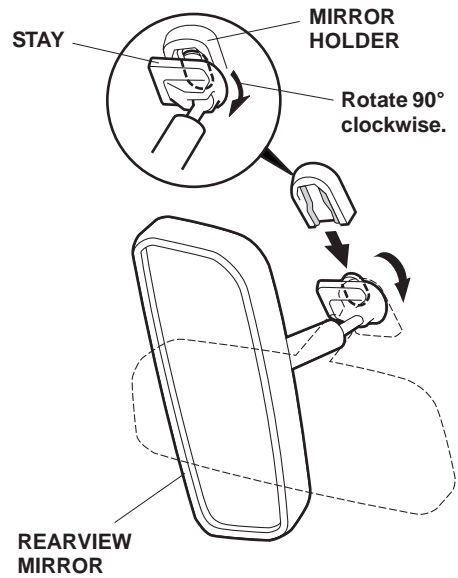


- Replace the clip. Slide the day/night mirror stay onto the mirror holder, then turn the mirror counterclockwise as shown.

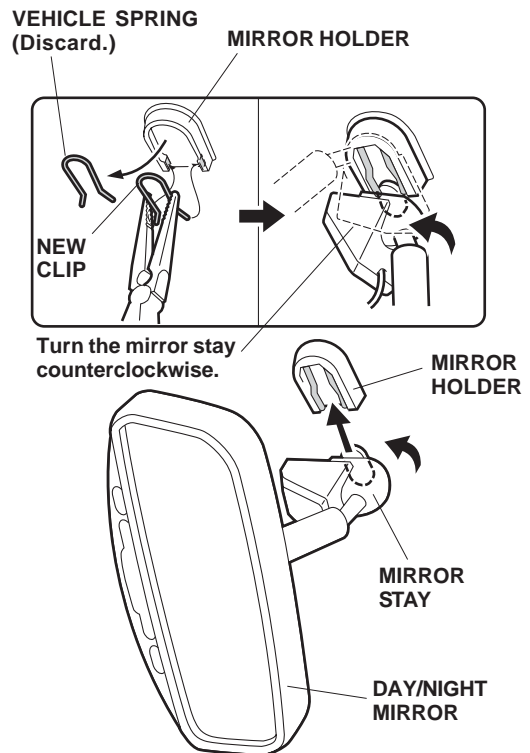


7. Plug the mirror harness 7-pin connector into the day/night mirror, then route the 4-pin connector up and out through the console opening U-shaped cutout in the roof liner. Check that the wires at the base of the 7-pin connector are not visible, if they are, slide the tube to cover them.

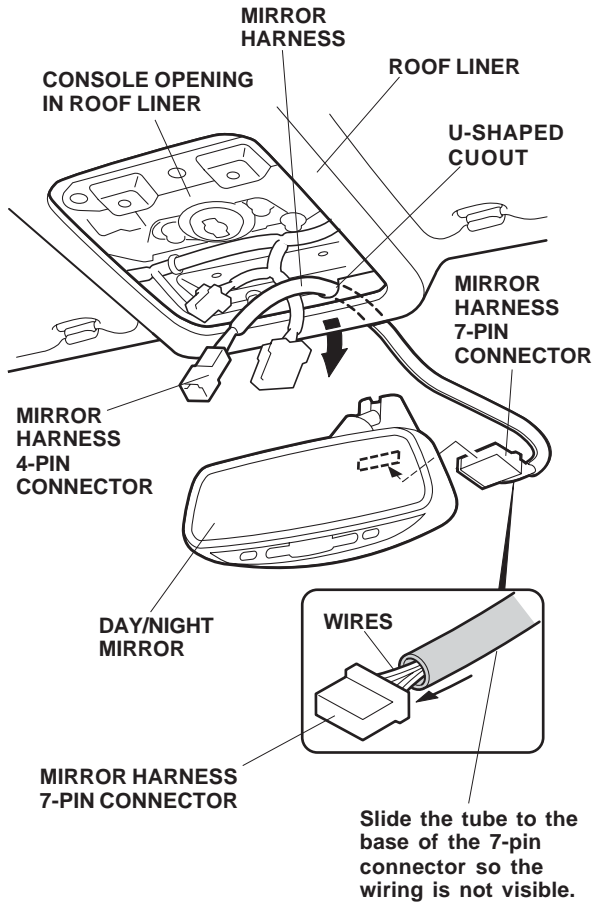

8. Slide the end of the upper cover into the lower cover, then route the mirror harness through the grooves in the cover. Attach the lower cover to the stay of the mirror mount.

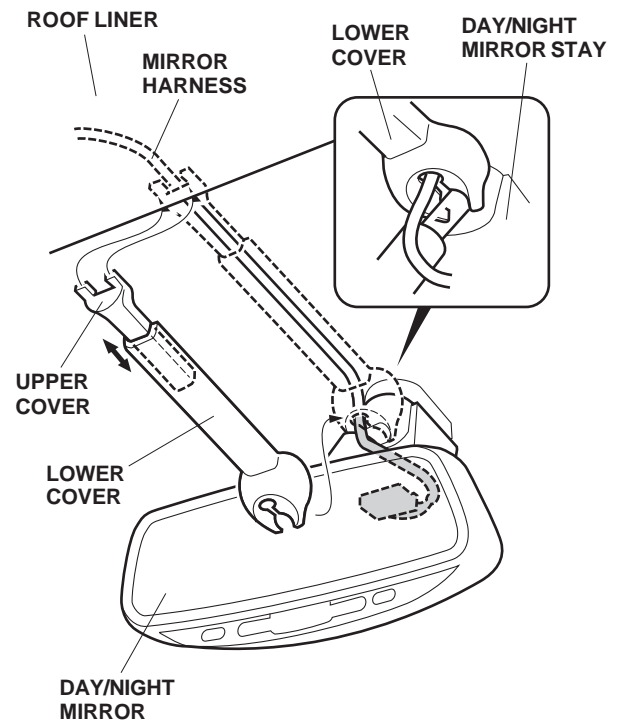

9. Slide the upper cover up under the roof liner.
10. Plug the mirror harness 4-pin connector into the vehicle 4-pin connector.

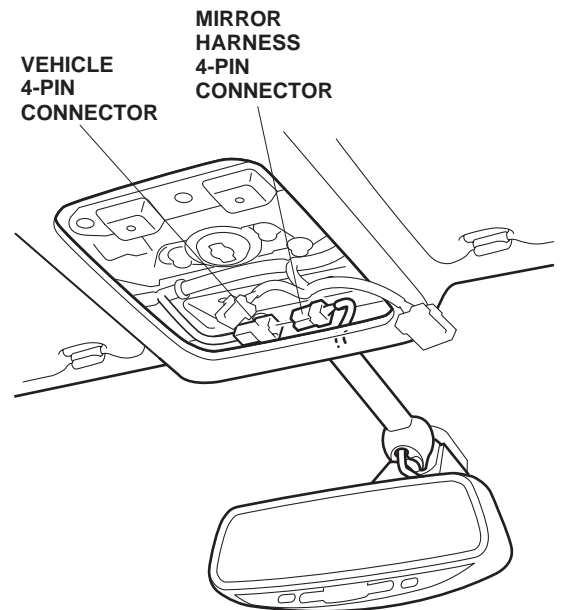

11. Check that all wire harnesses and cables are routed properly and that all connectors are plugged in.
12. Reinstall all removed parts. Check that all clips and fasteners are installed securely.
13. Reconnect the negative cable to the battery.
14. Enter the customer's radio anti-theft code, and reset the radio station presets.
15. Reset the clock.
16. Check the operation of the automatic day/night mirror according to the Operating Instructions supplied.
17. Place the day/night mirror Operating Instructions in the glove box.