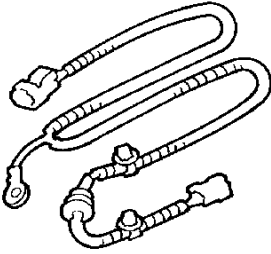



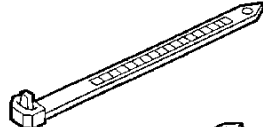

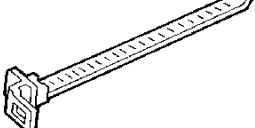


 HONDA INSTALLATION INSTRUCTIONS	Accessory	Application	Publications No.
	HOOD SWITCH P/N 08E49-S2A-100	2000 S2000	All 20593 Issue Date AUG 1999


PARTS LIST

- Hood switch harness 
- Hood switch bracket 
- Hood switch 
- Ground bolt 
- 12 Long wire ties 
- 2 Short wire ties 
- Wire tie with holder 
- Washer-bolt, 6 mm 
- Flange nut, 6 mm 

TOOLS AND SUPPLIES REQUIRED

- #2 Phillips screwdriver
- Flat-tip screwdriver
- Ratchet
- 10 mm Socket
- 10 mm Combination wrench
- Diagonal cutters
- Utility knife
- Piece of wire

Illustration of the Hood Switch Installed on the Car

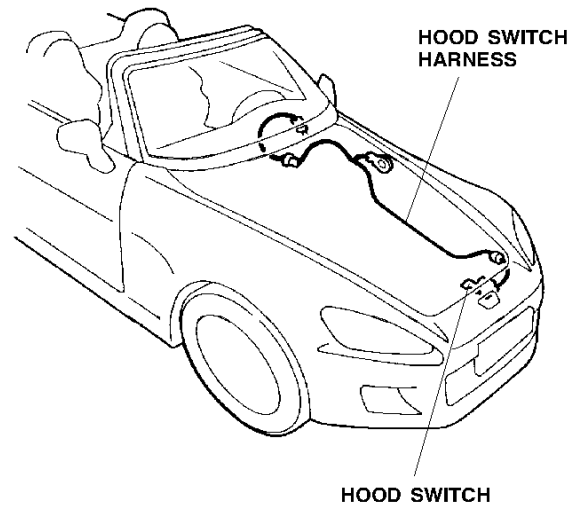


INSTALLATION


Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your car. These procedures should not be attempted by "do-it-yourselfers".

1. Make sure you have the anti-theft code for the radio, then write down the frequencies for the preset buttons.
2. Disconnect the negative cable from the battery.


3. Open the hood, then remove the air guide plate cover (three retaining clips).

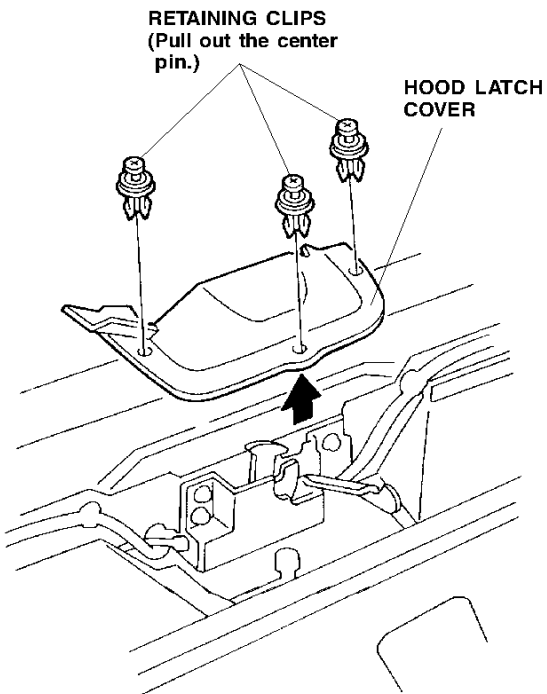


4. Remove the two retaining clips from left (driver's) side of the air guide.

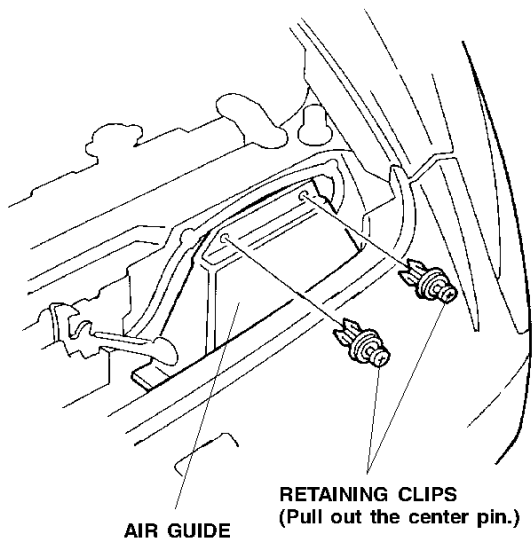

5. Remove the left (driver's side) washer-bolt securing the hood switch. Position the hood switch bracket on the front bulkhead, and reinstall the washer-bolt; then install 6 mm washer-bolt, and flange nut from the kit. You may need to pull the air guide forward to install the washer-bolt and flange nut.

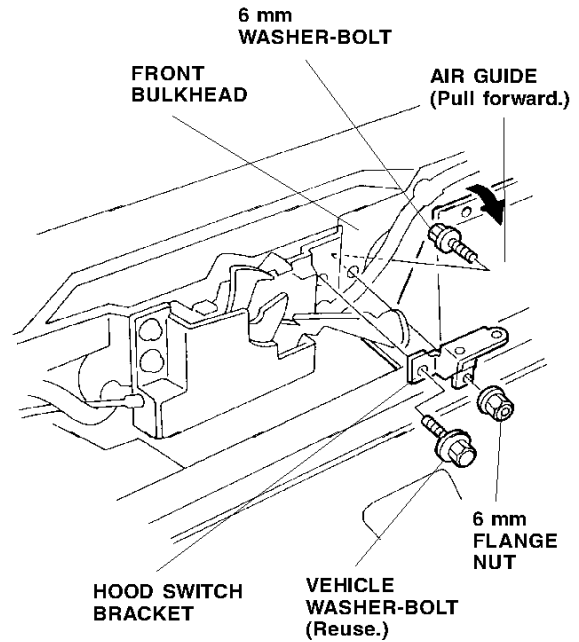


6. Remove the two screws and tape fastening the hood switch to the existing switch bracket, then remove and discard the existing bracket. Save the screws; they will be reused.

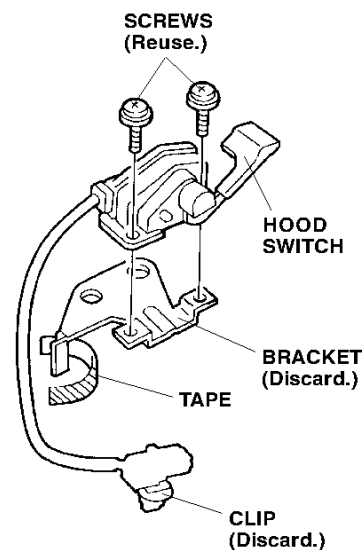


7. Remove and discard the clip from the connector of the hood switch.


8. Position the hood switch on the hood switch bracket you installed in step 5, and install the two screws you removed in step 6. Tighten the screws securely.

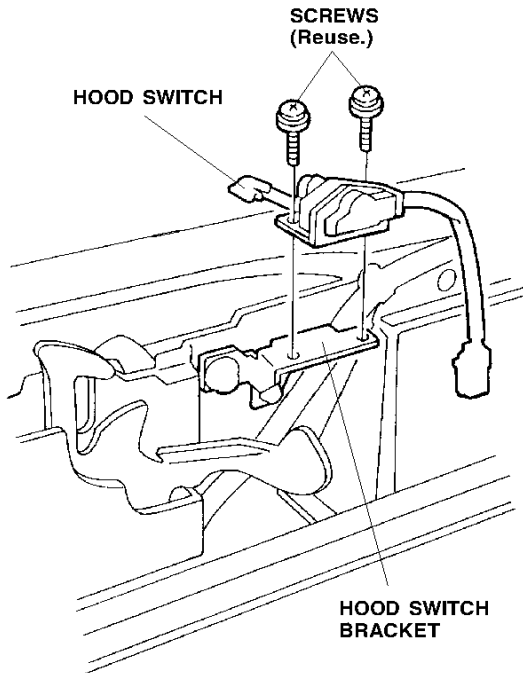


9. Route the wire harness of the hood switch as shown, and secure it to the vehicle harness with the two short wire ties.

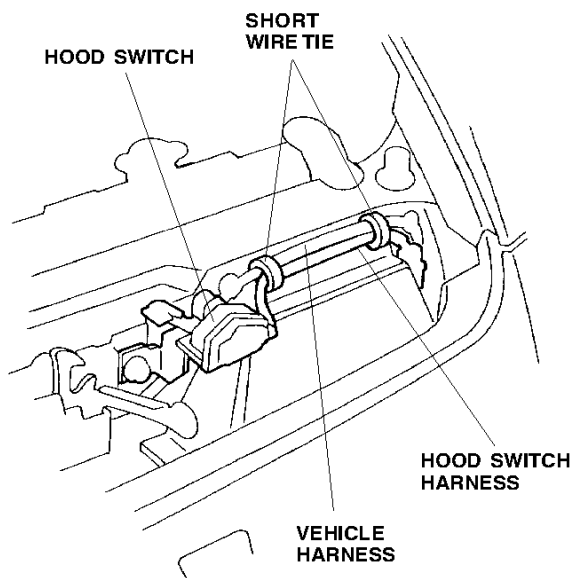


10. Lift up to remove the coolant reservoir from the bracket, and set it aside.

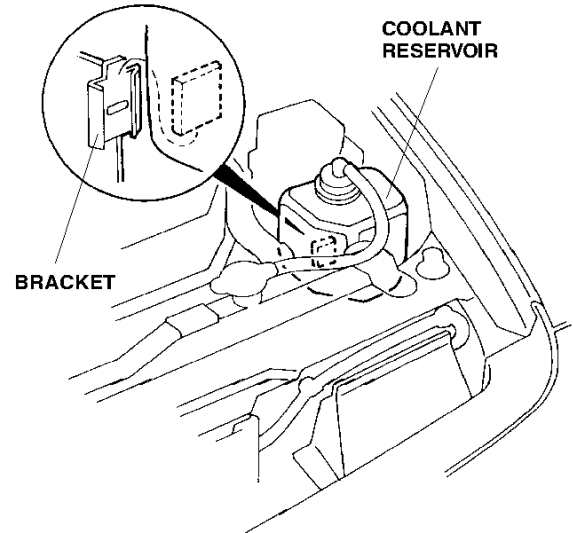


11. Move the auxiliary fuse box up and out of the way by releasing the two retaining tabs.

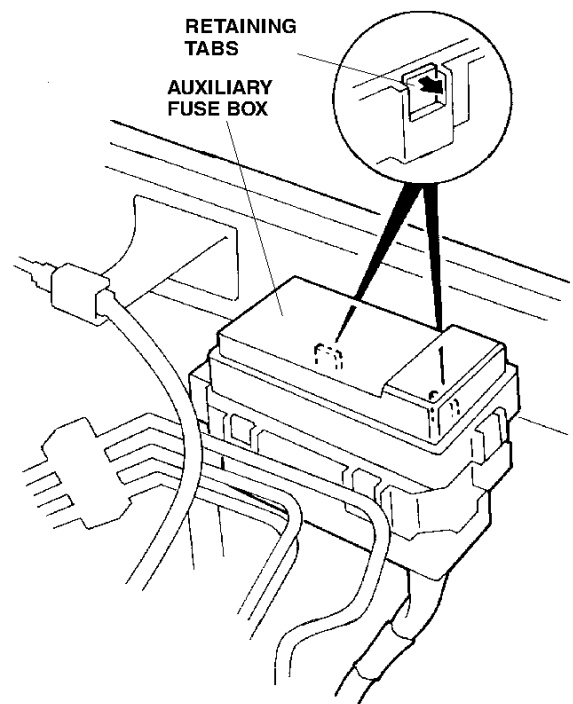

- At the front bulkhead, remove the bolt and the throttle cable bracket. Locate, remove, and discard the rubber grommet.

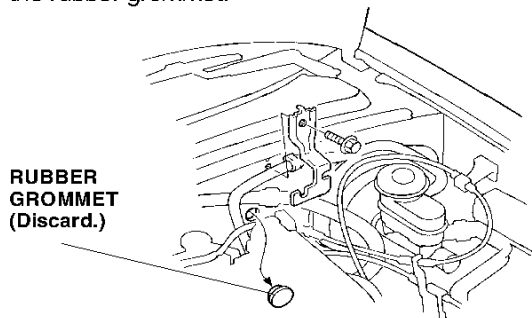


- Get the hood switch harness. Using a utility knife, cut off and remove the marked area of the rubber grommet. Be careful not damage the hood switch harness.

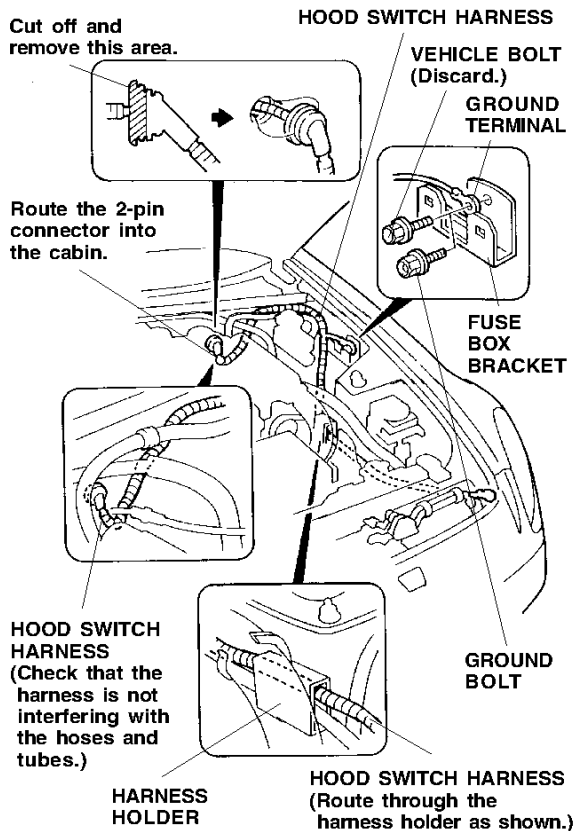


- Route the 2-pin connector (grommet end) of the hood switch harness into the passenger's compartment through the hole in the front bulkhead. Seat the grommet on the harness in the hole properly.
- Route the hood switch harness toward the front of the vehicle.
- Remove and discard the vehicle bolt securing the fuse box bracket, and attach the ground terminal to the fuse box bracket with the ground bolt provided.

- Plug the 2-pin connector of the hood switch harness into the 2-pin connector of the hood switch. Slide the holder of the wire tie with holder onto the 2-pin connector of the hood switch, then attach the wire tie with holder to the vehicle harness.

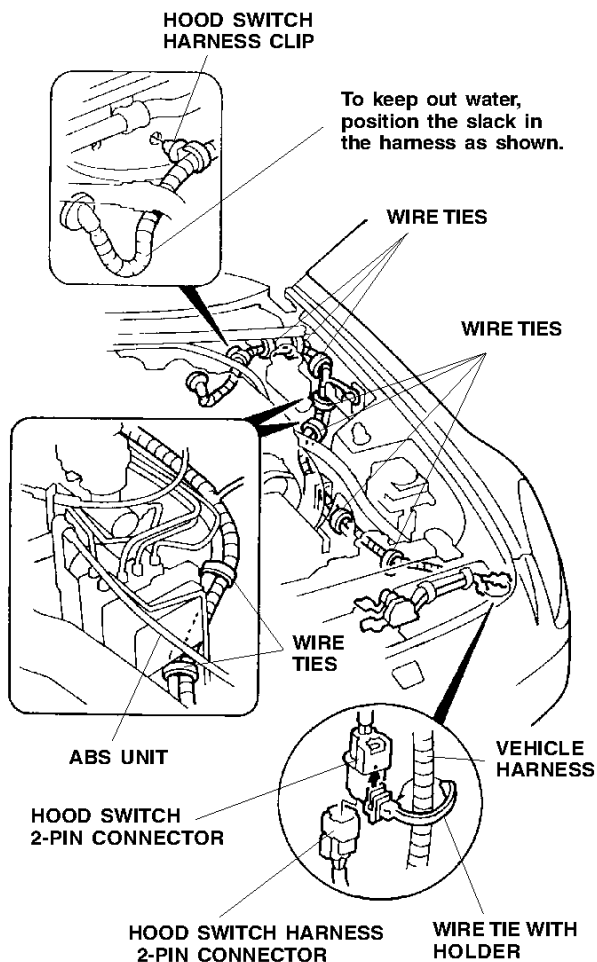


- Push the hood switch harness clip into the hole in the inner panel.
- Secure the hood switch harness to the vehicle harness with seven long wire ties in the areas shown.

20. Inside the passenger compartment, locate the 2-pin connector blue-taped to the security system harness. Remove the blue tape to free the connector.

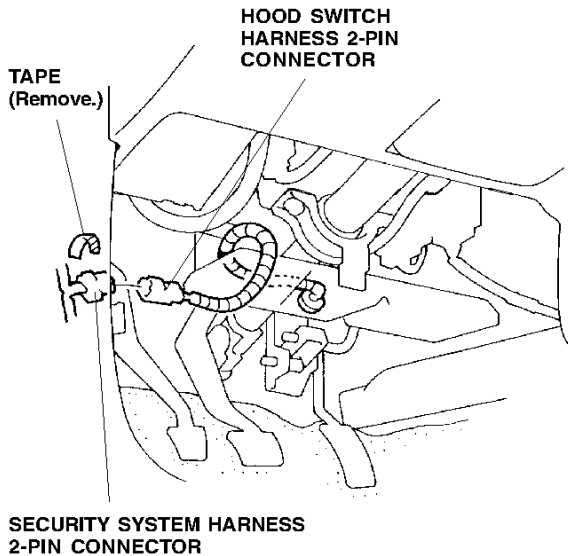

21. Route the hood switch harness 2-pin connector to the security system 2-pin connector, and plug in the connectors.
22. Push the clip on the hood switch harness into the hole in the brake pedal bracket.

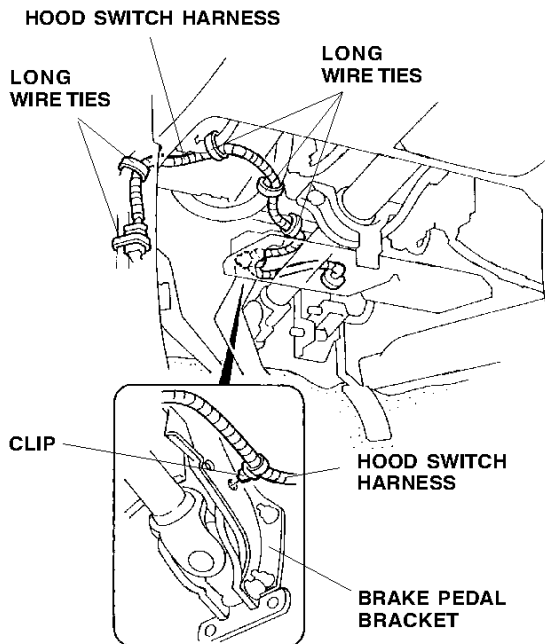

23. Secure the hood switch harness to the vehicle harness with five long wire ties in the areas shown.

23. Check that all wire harnesses are routed properly and all connectors are plugged in.
24. Reinstall all removed parts.
25. Reconnect the negative cable to the battery.
26. Enter the customer's radio anti-theft code, and reset the radio station presets.
27. Check operation of the hood switch according to the Security System Owner's Manual.