



INSTALLATION INSTRUCTIONS

Accessory
LEATHER SHIFT KNOB (M/T)
 P/N 08U92-SDA-100A

Application
ACCORD
2 AND 4-DOOR

Publications No.
All 24391
 Issue Date
AUG 2002

PARTS LIST

Leather shift knob




TOOLS REQUIRED


Long nose pliers

INSTALLATION


1. Squeeze the ring while you pull down on the shift boot. Remove the shift knob by turning it counterclockwise.

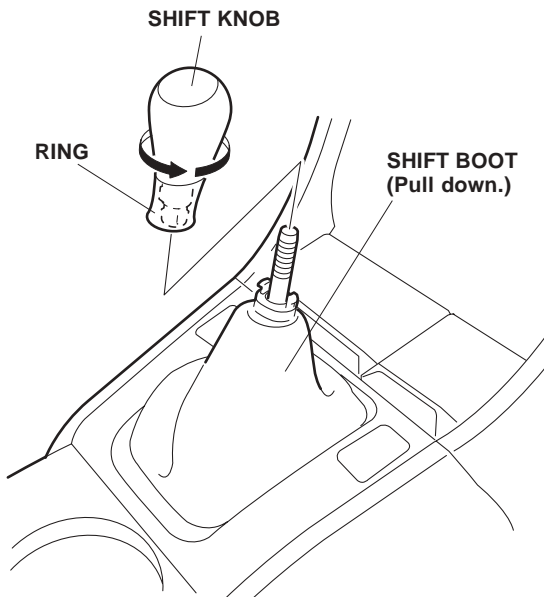


2. Remove the shift knob from the ring by squeezing the retaining pawls and pushing it up with long nose pliers.

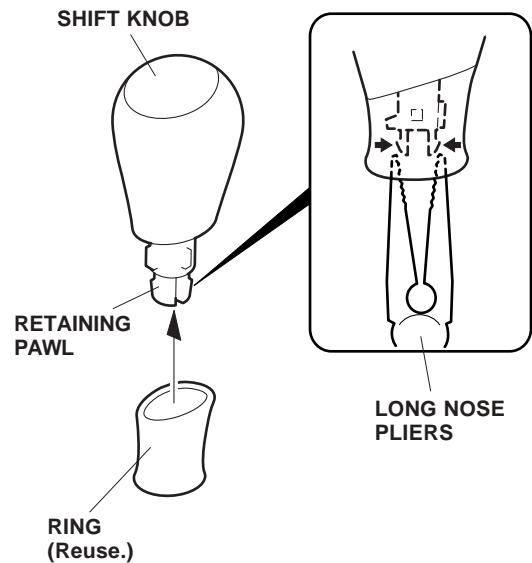

3. Transfer the ring to the leather shift knob.

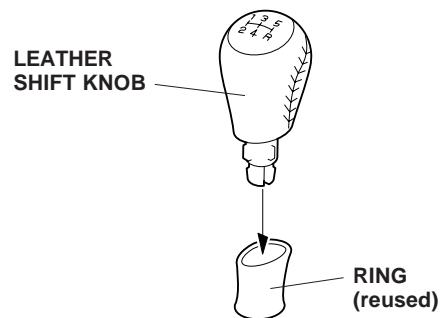

4. Install the leather shift knob on the shift lever by turning it in the clockwise direction.

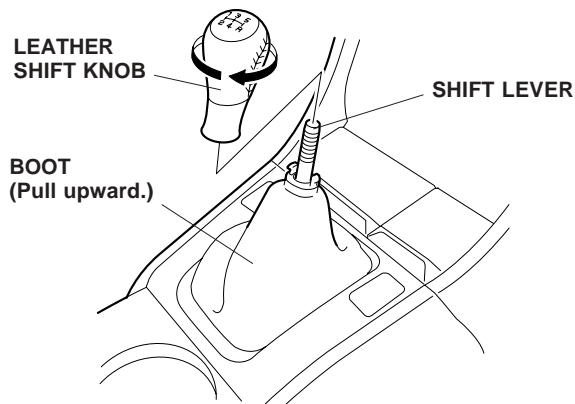

5. Pull the boot upward.

USE AND CARE

- Use a sponge or cloth and a solution of mild liquid dishwashing soap and water to clean the shift knob.
- Rinse the knob completely with water, then dry it with a shop towel.
- Never use organic solvents such as benzene, thinner, or gasoline to clean the shift knob.