



# INSTALLATION INSTRUCTIONS

Accessory  
**DOOR EDGE GUARDS**

Application  
**ACCORD  
4-DOOR**

Publications No.  
**All 30718**  
Issue Date  
**AUG 2005**

## PARTS LIST


Right front door edge guards




Left front door edge guards




Right rear door edge guard



Left rear door edge guard



Seam sealant cutting tool



## TOOLS AND SUPPLIES REQUIRED

Rubber mallet

Felt-tip pen

Touch-up paint

## INSTALLATION


**Customer Information:** The information in this instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

**NOTE:** This instruction shows the right door edge guards being installed. The same procedure applies to installing the left door edge guards.

1. Clean and wax the area to be covered with a high-quality paste wax.
2. Identify each door edge guard by holding it up to the door and matching its contour with the door edge.

### Installing the Front Door Edge Guards

3. Position each door edge guard against the inside edge of the door, using the bends for reference. Mark the sealant at the top and bottom of each door edge guard.


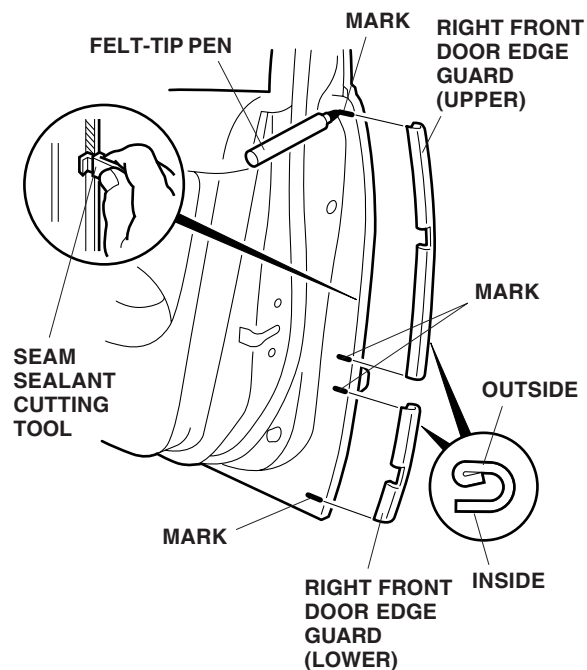


4. Position the cutting edge of the seam sealant cutting tool against the door edge, and trim the seam sealant from mark to mark, top and bottom.

**NOTE:** The cutting tool cuts only in one direction. Move it upward on the right side of the car and downward on the left side.

5. Apply touch-up paint to the door, and let it dry.

- Position the door edge guards on the door edge, and tap them into position with a series of light taps with a rubber mallet.

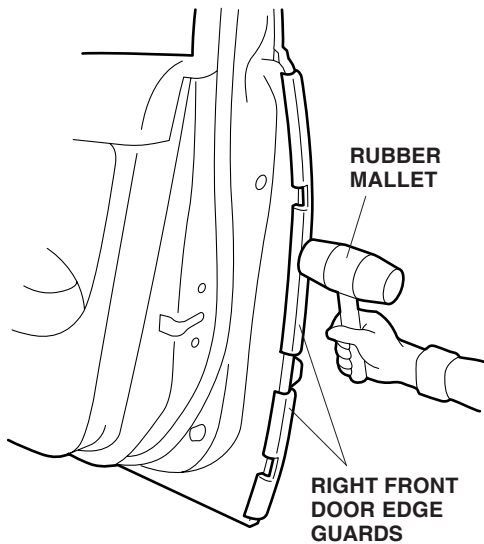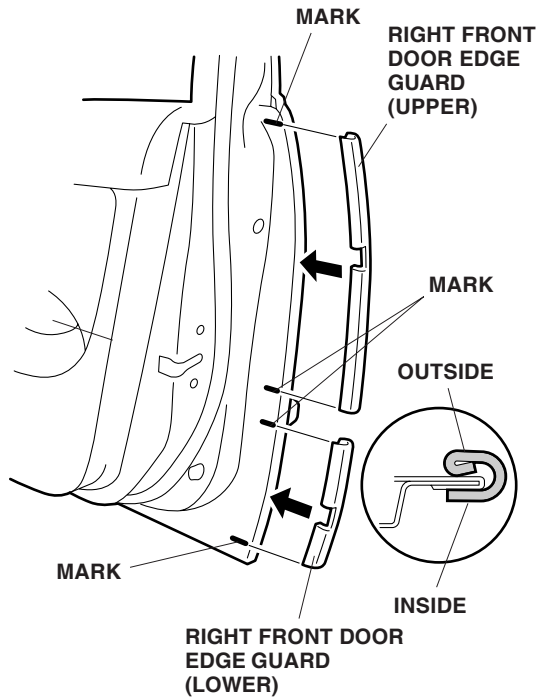

- Repeat steps 3 thru 6 to install the left door edge guards.

### Installing the Rear Door Edge Guards

- Repeat steps 3 thru 7 to install both rear door edge guards. Start tapping at the wheelwell bend.

