



<b>H HONDA</b> <b>INSTALLATION INSTRUCTIONS</b>	Accessory	Application	Publications No.
	<b>DOOR EDGE GUARDS</b>	<b>2000 ACCORD 2-DOOR</b>	<b>All 20524</b>
			Issue Date
			<b>JULY 1999</b>

## PARTS LIST


Right front door edge guard

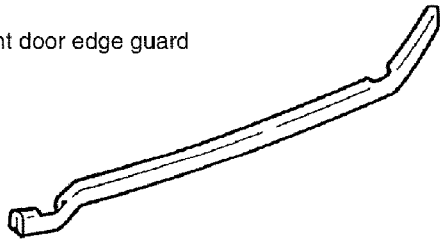

Left front door edge guard

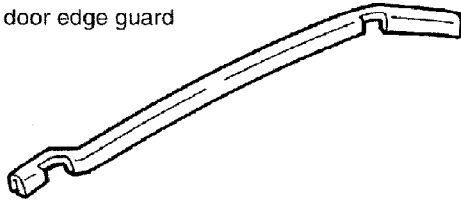

Hem sealant cutting tool




## TOOLS AND SUPPLIES REQUIRED

Rubber mallet  
Felt-tip pen  
Touch-up paint

## INSTALLATION


1. Clean and wax the area to be covered with a high-quality paste wax.
2. Identify each door edge guard by holding it up to the door and matching its contour with the door edge.

3. Hold the guard against the inside edge of the door, and mark the sealant at the top and bottom of the ending points of the door edge guard.

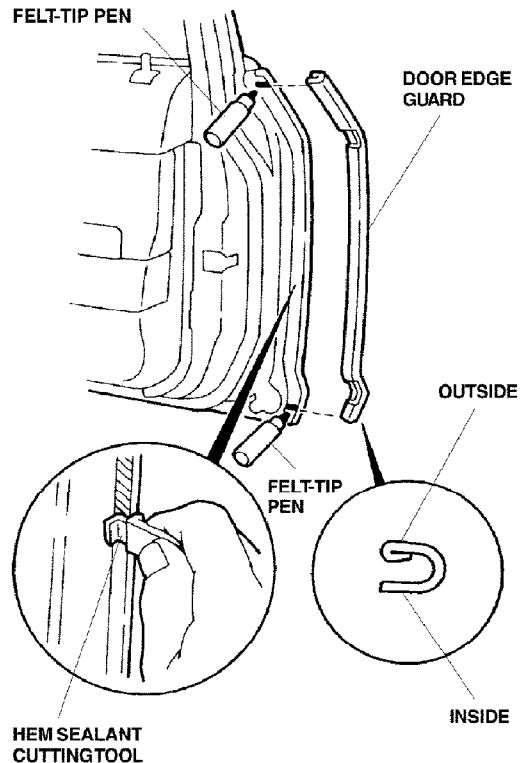

4. Position the hem sealant cutting tool against the door edge as shown, and trim the hem flange sealant from mark to mark.
5. Apply touch-up paint to the door, and let it dry.

6. Position the door edge guard on the door edge, and tap it into position with a series of light taps using a rubber mallet.

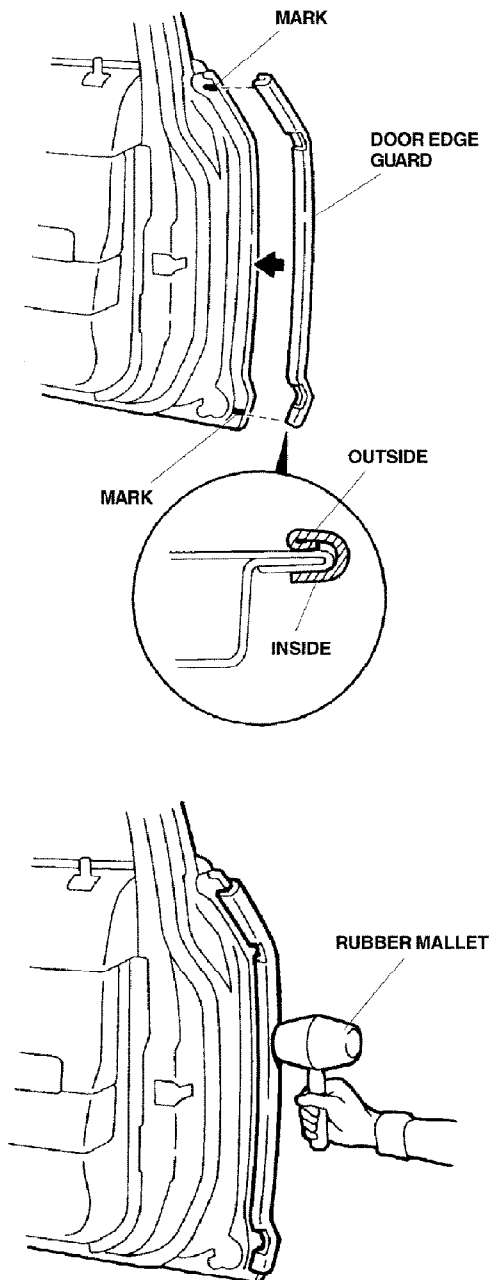

7. Repeat steps 3 through 6 to install the other door edge guard.