


H HONDA INSTALLATION INSTRUCTIONS	Accessory	Application	Publications No.
	FULL NOSE MASK P/N 08P35-S82-100G	2000 ACCORD 2-DOOR	All 20528
			Issue Date
			JULY 1999

PARTS LIST

Mask (hood section)



Mask (bumper section)

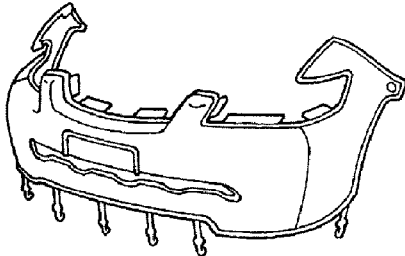

2 Snap-screws



2 Washers



2 Fenderwell nuts



Storage bag



TOOLS REQUIRED

Stubby #2 Phillips screwdriver

Scissors


INSTALLATION

- Make sure the vehicle and the mask are clean and completely dry before installation. If moisture under the mask is allowed to dry, it may cloud the paint. If the mask gets wet, remove it and allow it to air-dry completely.
- Make sure any repainted surfaces are cured.
- Make sure the hood and nose of the vehicle have been waxed with a high-quality paste wax.
- Make sure you install the nose mask securely. If the nose mask starts to flap or comes loose while driving, safely pull off the highway, stop the vehicle, and secure or remove the mask.

Displaying the License Plate


If your state law requires the display of both license plates, cut out the piece of the bumper section that covers the front license plate.

- Face the inside of the mask toward you.
- Carefully cut out the license plate section with scissors at the top seams, and remove the overcast stitching.



Installing the Hood Section


1. Open the hood. Fit the corners of the mask around the hood; adjust it so that it fits smoothly over the edges.

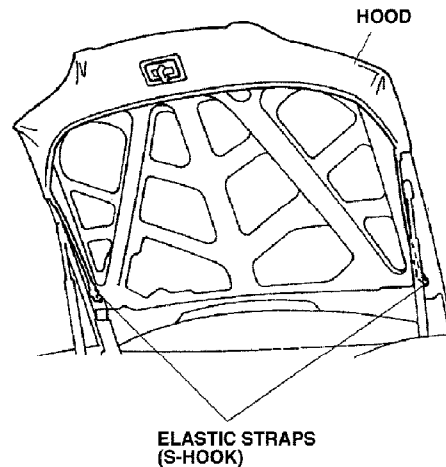


2. Secure the mask by hooking the five elastic straps to the holes in the back of the hood.

Installing the Bumper Section


3. Turn the steering wheel all the way clockwise.
4. Pry out the plastic pin, and remove the expansion clip that fastens the inner fender; remove and retain the clip, then clean the area around the hole.

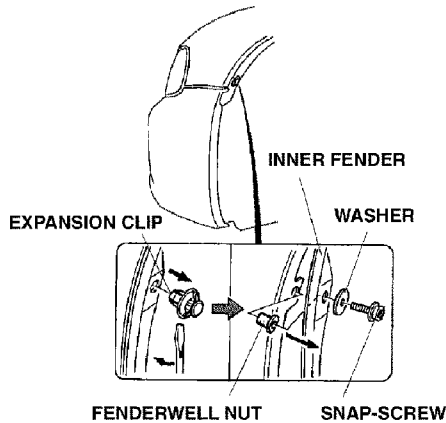


5. Pull out the inner fender, and press one fenderwell nut into the hole in the fender flange.
6. With its washer in place, securely tighten one snap-screw into the fenderwell nut.
7. Turn the steering wheel all the way counterclockwise and repeat steps 4 through 6 on the other side of the vehicle.
8. Slip the pocket of the mask's fender section onto the front corner of the fender; then attach the plastic clip to the top inside edge of the fender. Fit the mask across the bumper, and attach it to the other side in the same way.

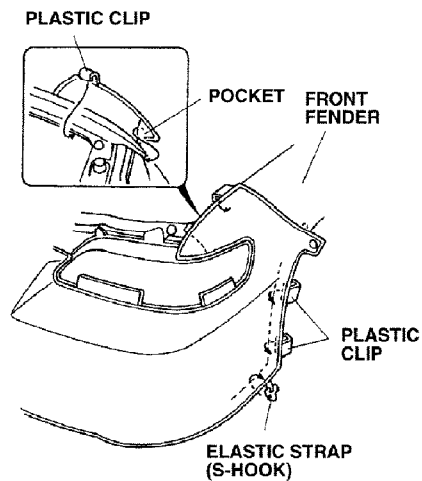

9. Attach the plastic clips and elastic strap on the mask's bumper section onto the bottom corner of the bumper. Attach the mask to the other side the same way.
10. Pull the mask back toward the wheelwell, smooth out any wrinkles, and snap the mask to the snap-screw. Repeat on the other side.




11. Insert the ten upper tabs of the mask into the headlight on both sides and into the front bumper grille.

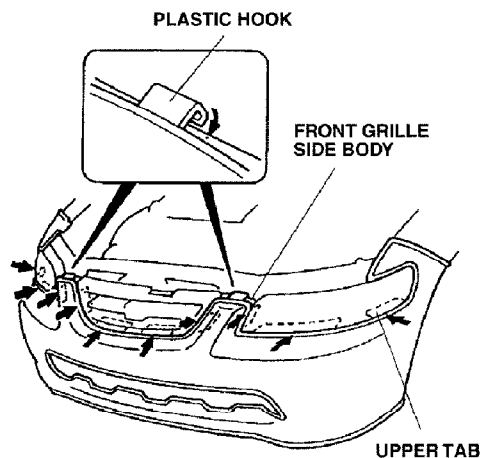

12. Attach one plastic hook to the top of the front bumper on each side of the front grille.

13. Attach four elastic straps to the top edge of the front bumper grille opening, and attach four elastic straps to the bottom of the bumper.

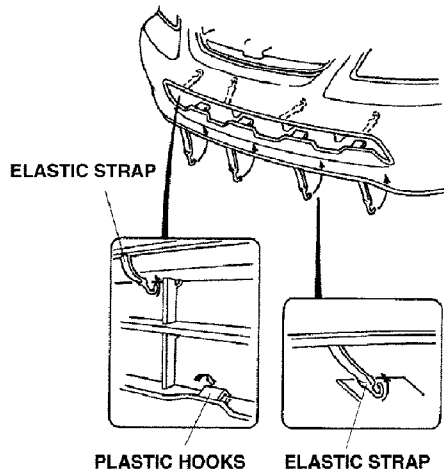

14. Attach the four plastic hooks to the bottom of the front bumper grille opening.
15. Put these instructions and the expansion clips (removed in step 4) into the storage bag, and place it in the trunk for future use.

CLEANING THE NOSE MASK

Use a sponge or cloth and a solution of mild liquid dishwashing soap and water to clean the vinyl and the flannel backing. Rinse the mask completely with clean water and hang it to dry out of direct sunlight. Make sure the mask is completely dry before you reinstall it.