 HONDA INSTALLATION INSTRUCTIONS	Accessory	Application	Publications No.
	WHEEL CAP GOLD DECAL P/N 08W40-S84-100	2000 ACCORD 2- AND 4-DOOR	All 20520
			Issue Date JULY 1999

PARTS LIST

Wheel cap gold decal



SUPPLIES REQUIRED

Isopropyl alcohol
Shop towel



INSTALLATION

NOTE:

- The wheel cap gold decal should be installed only when the ambient air temperature is 60°F (15°C) or above.
- To allow the adhesive to cure, do not wash the vehicle for 24 hours.

1. Remove the existing decal from the wheel cap.

2. Using isopropyl alcohol on a shop towel, clean the inside of the wheel cap.

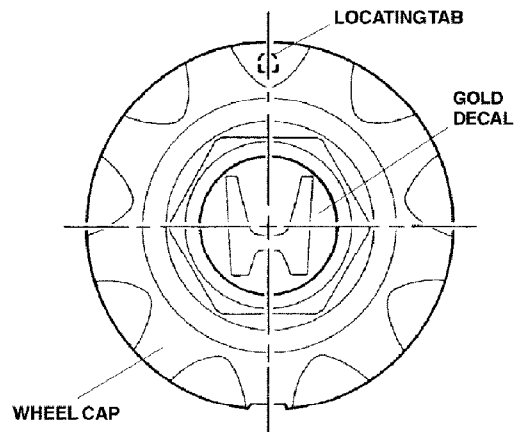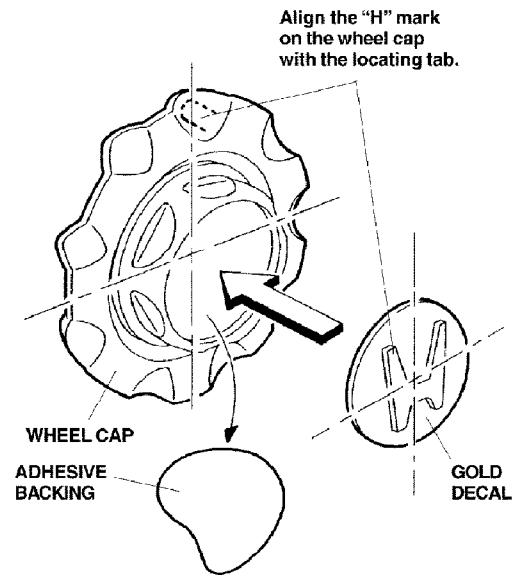

3. Remove the adhesive backing from the decal. Align the center of the "H" with the locating tab on the wheel cap, and attach the decal. (If your wheel cap doesn't have a locating tab, you may install the decal in any direction.)

NOTE: After the decal is installed, tell your customer not to wash the vehicle for 24 hours to give the adhesive time to cure.