



INSTALLATION INSTRUCTIONS

Accessory

SELECT KNOB

Application

FIT (A/T)

Publications No.


All 31714

Issue Date

MAR 2006

PARTS LIST

Select knob

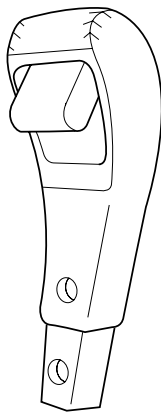


TOOL REQUIRED


Phillips screwdriver

INSTALLATION

1. Remove the two screws. Remove the select knob by pulling it upward while pulling up on the select switch in the direction shown.

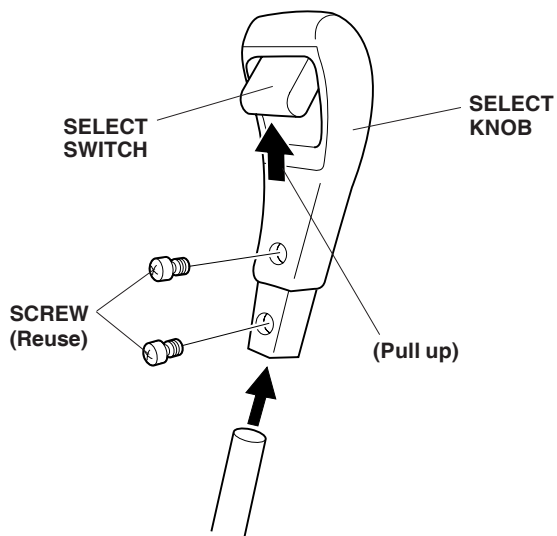

2. Get the new select knob from the kit and slide it onto the select rod while pulling up on the select switch in the direction shown.

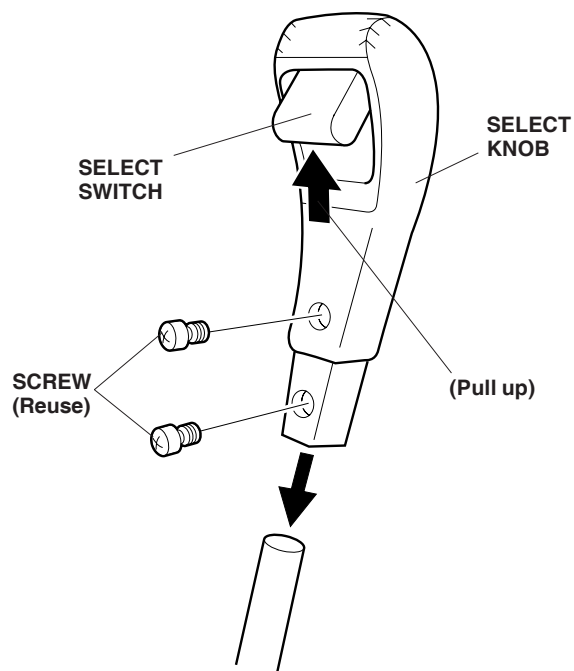

3. Reinstall the two screws.