



# HONDA INSTALLATION INSTRUCTIONS


Accessory  
DOOR EDGE GUARDS

Application  
2013 CIVIC  
2-DOOR


Publications No.  
All 13057  
Issue Date  
NOV 2012

## PARTS LIST


Left door edge guard

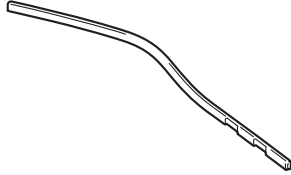

Right door edge guard

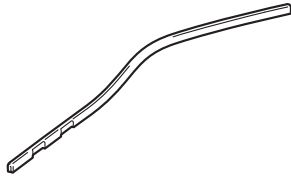

Seam sealant cutting tool



## TOOLS AND SUPPLIES REQUIRED

Rubber mallet  
Felt-tip pen  
Touch-up paint  
Tape measure  
High-quality paste wax

## INSTALLATION


**Customer Information:** The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by “do-it-yourselfers.”

### NOTE:

- Door edge guards cannot be installed if the vehicle is already equipped with body side moldings.
- If your customer also wants body side moldings (sold separately), install them after you install the door edge guards.
- These instructions show the right door edge guard being installed. The same procedure applies to installing the left door edge guard.
- Be careful not to damage the body paint finish.
- Clean and wax the areas to be covered with a high-quality paste wax.
- Identify each door edge guard by holding it up to the door and matching its contour with the door edge.


## Installing the Door Edge Guards

1. Gently place the right front door edge guard on the right front door in the position shown.

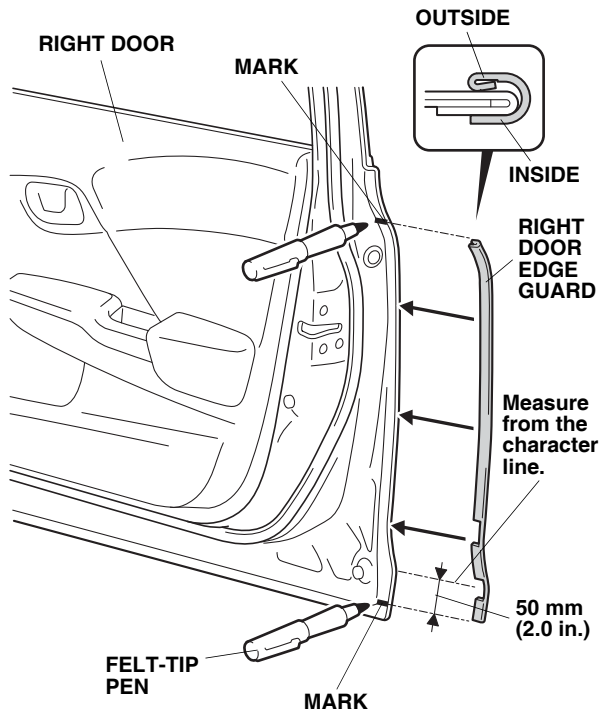


2. Using a felt-tip pen, mark the sealant at the top and bottom ending point of right door edge guard.
3. Remove the right door edge guard.


4. Position the cutting edge of the seam sealant cutting tool against the right door edge, and trim the seam sealant from mark to mark. The cutting tool cuts in only one direction.

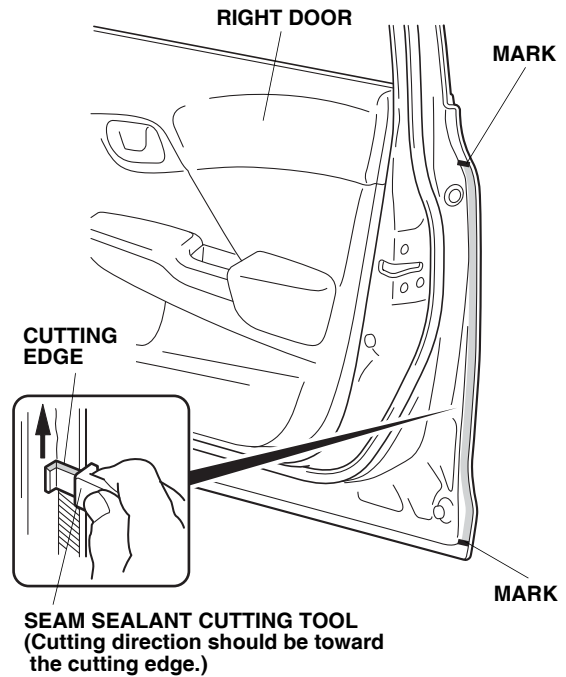

5. Apply touch-up paint to the cut seam sealant area, and let it dry.
6. Position the right door edge guard on the right door edge, and align it with the marks made in step 2.

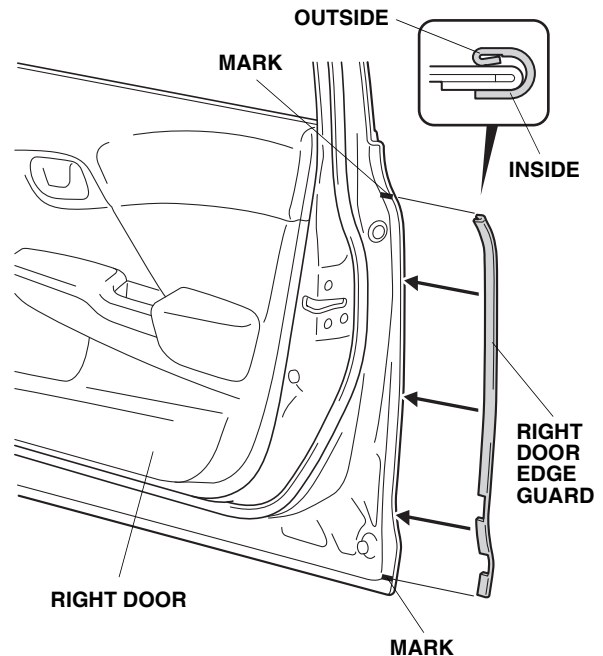

7. Starting at the character line, gently tap the right door edge guard into position with a series of light taps using a rubber mallet, then work up and down. Make sure the position of the right door edge guard is correct. Once in place, do not remove, reposition, or reinstall the right door edge guard or it will not hold securely.

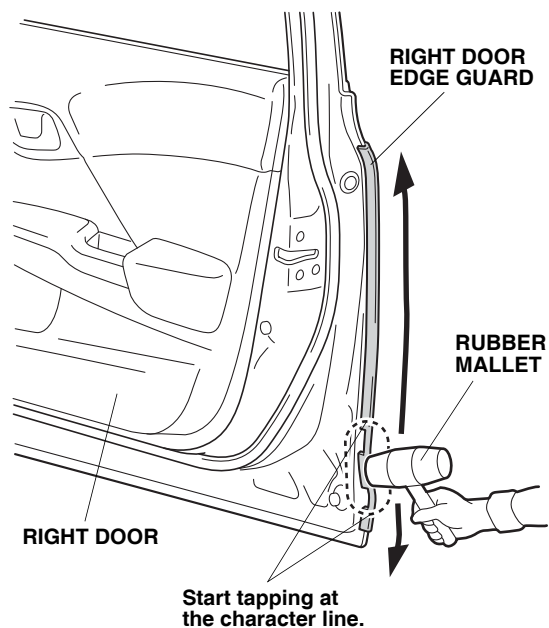

8. Repeat steps 1 through 7 to install the left door edge guard on the left side of the vehicle.