

 HONDA INSTALLATION INSTRUCTIONS	Accessory	Application	Publications No. All 21892
	DOOR EDGE GUARDS	2001 CIVIC 4-DOOR	Issue Date SEP 2000

PARTS LIST


Right front door edge guard (upper)




Left front door edge guard (upper)



Right front door edge guard (lower)




Left front door edge guard (lower)




Right rear door edge guard



Left rear door edge guard

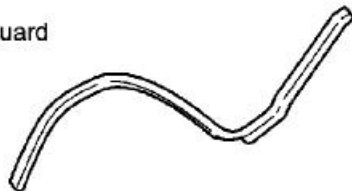

Hem sealant cutting tool



TOOLS AND SUPPLIES REQUIRED


- Rubber mallet
- Felt-tip pen
- Touch-up paint

INSTALLATION

1. Clean and wax the area to be covered with a high-quality paste wax.
2. Identify each door edge guard by holding it up to the door and matching its contour with the door edge.

Installing the Front Door Edge Guards

3. Hold the guard against the inside edge of the door, and mark the sealant at the top and bottom of the ending points of the door edge guard.


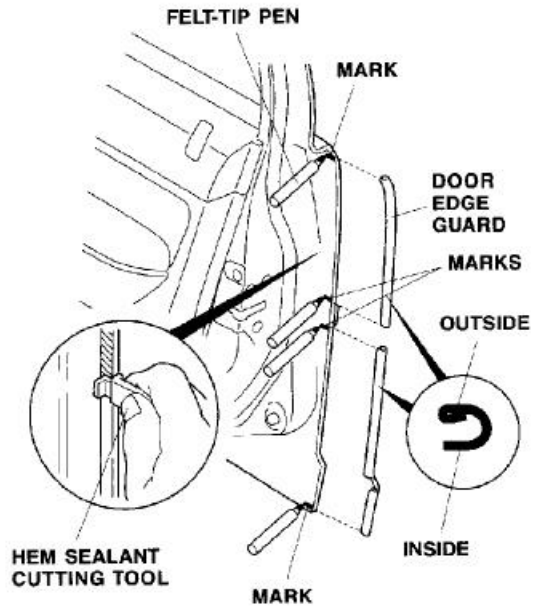


4. Position the hem sealant cutting tool against the door edge as shown, and trim the hem flange sealant from mark to mark, top and bottom.

PUB No. Title
AI AII21892 2001 CIVIC 4-DOOR DOOR EDGE GUARDS

Issued
09/12/00

5. Apply touch-up paint to the door, and let it dry.
6. Position the door edge guard on the door edge, and tap it into position with a series of light taps using a rubber mallet.

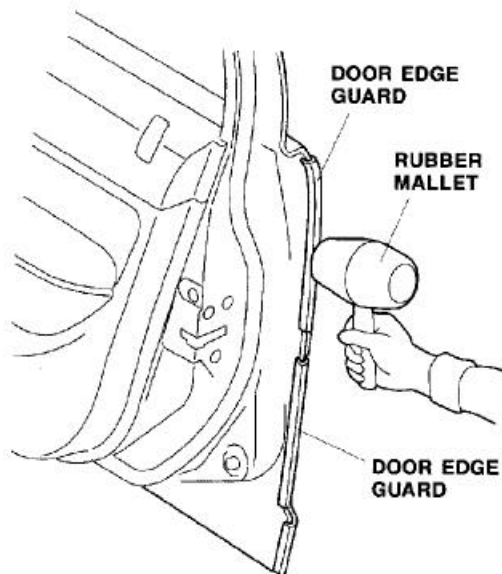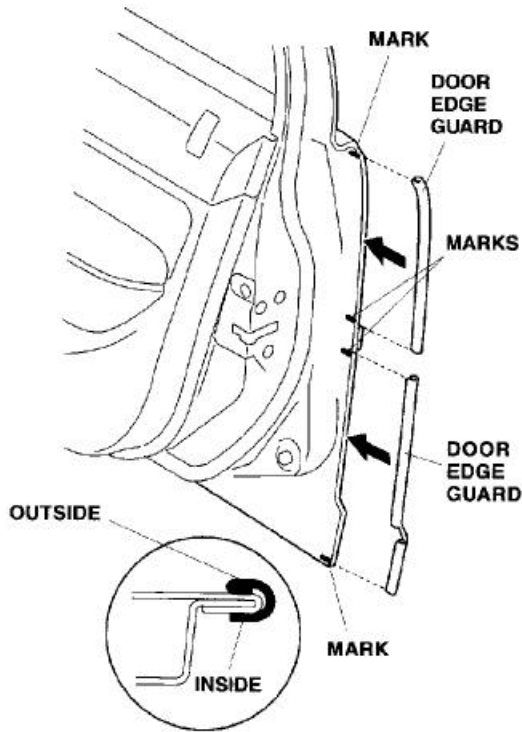

7. Repeat steps 2 through 6 to install the other door edge guard.

Installing the Rear Door Edge Guards

8. Repeat steps 1 through 6 to install both rear door edge guards. Start tapping at the wheelwell bend.

