http://www.HandA-Accessories.com

HONDA

INSTALLATION INSTRUCTIONS

Accessory	Application	Publications No.
TAILLIGHT GUARDS P/N 08P10-ED1100	PASSPORT	AII 21970
		Issue Date JULY 2000

PARTS LIST

Right taillight guard

Left taillight guard

SUPPLIES REQUIRED

Clean lint-free wiping cloth

50/50 Water/isopropyl alcohol mix

INSTALLATION

NOTE:

- These illustrations show the right taillight guard being installed; the same procedure applies to installing the left taillight guard.
- The taillight guards should be installed only when the ambient air temperature is 60°F (15°C) or above.
- To allow the adhesive to cure, do not wash the vehicle for 24 hours.

1. Trial-fit the taillight guard on the taillight, and note the locating tabs on the taillight guard. Remove the taillight guard.

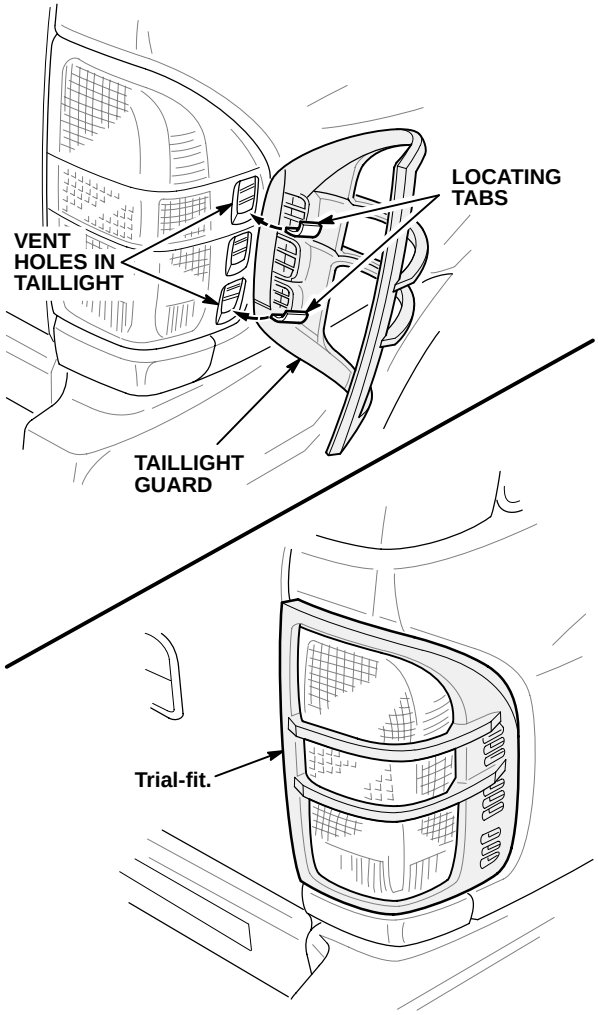

© 2000 American Honda Motor Co., Inc. – All Rights Reserved

2. Thoroughly clean the rear taillight lens with a 50/50 water/isopropyl alcohol mix and a clean lint-free cloth.

3. On the inside of the taillight guard, fold back approximately 1 inch of adhesive backing from each piece of adhesive tape.

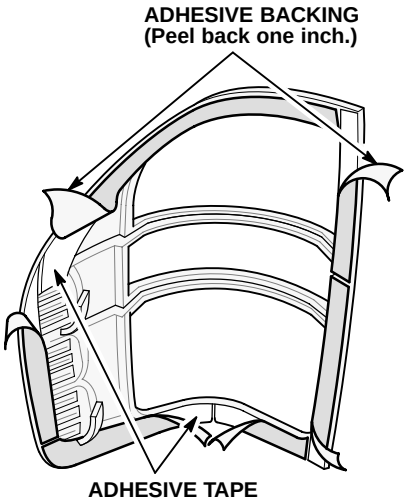

4. Position the taillight guard on the taillight. While holding the taillight guard in position, slowly and carefully remove each piece of adhesive tape.

5. Gently press around the outside edge of the taillight guard with the palm of your hand.

6. Repeat steps 1 through 6 to install the left taillight guard.

NOTE: Tell your customer not to wash the vehicle for 24 hours to allow the adhesive time to cure.

© 2000 American Honda Motor Co., Inc. – All Rights Reserved